


ISO 9001:2000 certified

# MesaThane™ 6036

## Aboveground Storage Tank Seal Material

**Mesa**  
**Rubber Company**

Division of **Mi** Mesa Industries, Inc  
Since 1967

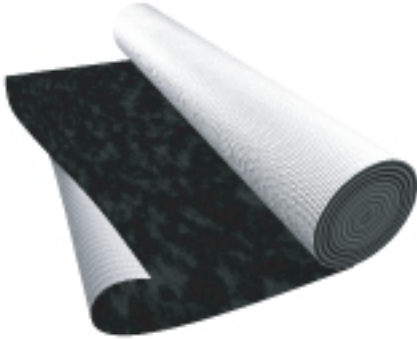

**Designed for superior strength and flexibility.**

**MesaThane 6036** is a reinforced premium-grade urethane laminate featuring superior chemical, abrasion, puncture, ozone and U/V resistance. 6036 is compatible with 100% aromatic hydrocarbon vapors, gasoline, crude oil and many other chemical solvents. 6036 offers excellent tensile strength and flexibility. Applications include Floating Roof Seals, Gauge Pole Covers, Leg Boots, Collapsible Storage Tanks, Vapor Bladders, Pontoon Liners and other custom applications.

	6036-20	6036-25	6036-35	6036-45	6036-55
Base Fabric	_____		Polyester	_____	
Finished Product	_____		Urethane	_____	
Weight	14.1 oz/yd <sup>2</sup>	18.3 oz/yd <sup>2</sup>	30 oz/yd <sup>2</sup>	35 oz/yd <sup>2</sup>	45 oz/yd <sup>2</sup>
FTMS 191A-5041	478 g/m <sup>2</sup>	621 g/m <sup>2</sup>	1017 g/m <sup>2</sup>	1187 g/m <sup>2</sup>	1526 g/m <sup>2</sup>
Gauge	.020 in .51 mm	.025 in .64 mm	.035 in .89 mm	.045 in 1.14 mm	.055 in 1.40 mm
Standard Width	_____		60 in (1.5 m)	_____	
Tensile Strength Warp	101 lb	197 lb	248 lb	253 lb	258 lb
FTMS 191-A-5100	449 N	876 N	1103 N	1125 N	1148 N
Tensile Strength Fill	105 lb	188 lb	255 lb	261 lb	265 lb
FTMS 191-A-5100	467 N	836 N	1134 N	1161 N	1179 N
Tear Strength Warp	30 lb	53 lb	55 lb	57 lb	57 lb
ASTM D-2261	134 N	236 N	245 N	254 N	254 N
Tear Strength Fill	33 lb	56 lb	59 lb	60 lb	60 lb
ASTM D-2261	147 N	249 N	263 N	267 N	267 N
Hydrostatic Resistance	150 psi	320 psi	410 psi	450 psi	465 psi
FTMS 191-A-5512	1.03 MPa	2.21 MPa	2.83 MPa	3.10 MPa	3.21 MPa
Puncture Resistance	60.1 lb	77.3 lb	90 lb	96.3 lb	96.3 lb
ASTM D-4833	267 N	344 N	400 N	428 N	428 N
Temperature Range	_____ -40°F to 210°F (-40°C to 98.9°C) _____				
Abrasion Resistance (cycles)	2,650*	5,000*	15,000*	45,000*	60,000*
Taber Wheel H-18 / 1kg	*No fabric exposure				

Values represent nominal average value properties. This information is furnished upon the condition that the person receiving it shall evaluate its suitability for the specific application.



### Northeast

4141 Airport Road  
Cincinnati, OH 45226-1643  
Phone: 513.321.4511  
Fax: 513.321.8178

### Southeast

9202 Meadow Vista Blvd.  
Houston, TX 77064-2012  
Phone: 281.469.8098  
Fax: 281.469.9524

### West

1726 South Magnolia Ave.  
Monrovia, CA 91016-4595  
Phone: 626.359.9361  
Fax: 626.359.7985

MR-6036-07-B